




SURFACES FORM CUBE



FEATURES

- Fully homogeneous and uniform diffuser appearance.
- Connect or abut fixtures with seamless light.
- Range of light outputs available.
- Surface mounted, flush recessed and plaster-in variations.
- 50,000+ hours life expectancy.
- IP40 up to IP68 protection available.
- Diffuser customisations and optics available.
- Wide selection of controls options.
- Luminaire output up to 10,000 lm/m²

TECHNICAL INFO

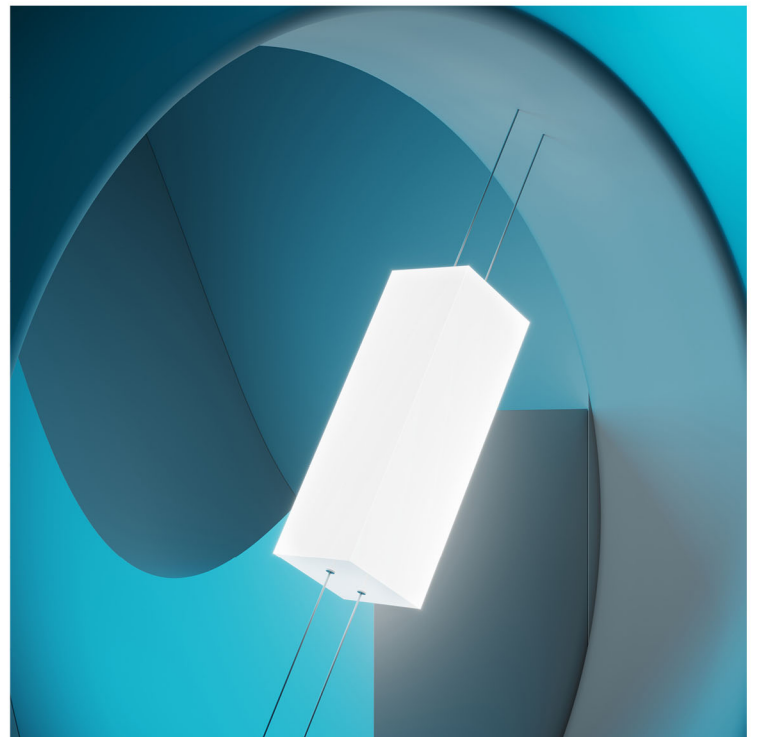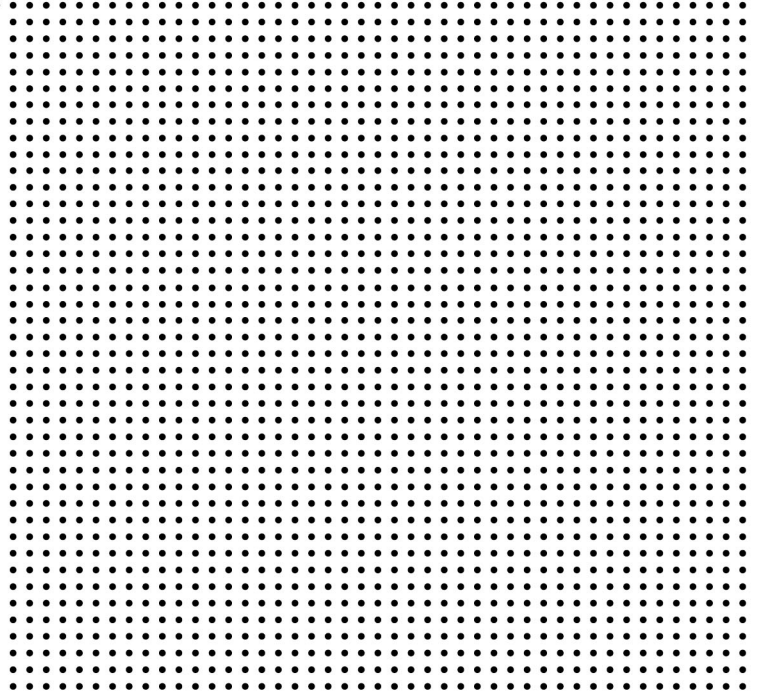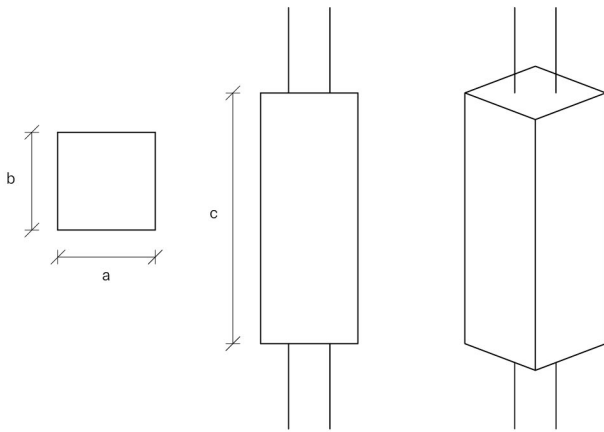

EXAMPLE ORDER CODE

FAB-F-CUB-100-100-100-55-40-2700-FA-CL-SWITCHED

DIM A	DIM B	DIM C	OUTPUT	IP RATING	LIGHT COLOUR	DIFFUSER	MOUNTING	CONTROL
Min 100	Min 100	Min 100	55	40	2700	Frosted Acrylic - FA	Clips - CL	Switched
150	150	200	110	44	3000	Opal Acrylic - OA	Suspended - S	Dali
150	150	200	165	65	3000	Dark Acrylic - DA		Dali
150	150	200		67	4000	Opal Glass - OA		Dali
200	200	300		68	5000			DMX
300	300	400			RGB			Art-Net
1000	1000	1000			RGBW			Fab Content
SITE	SITE	SITE			RGBWW			
					RGBCW/WW			