



SURFACES FORM CYLINDER



FEATURES

- Fully homogeneous and uniform diffuser appearance.
- Connect or abut fixtures with seamless light.
- Range of light outputs available.
- Surface mounted, flush recessed and plaster-in variations.
- 50,000+ hours life expectancy.
- IP40 up to IP68 protection available.
- Diffuser customisations and optics available.
- Wide selection of controls options.
- Luminaire output up to 10,000 lm/m²

TECHNICAL INFO

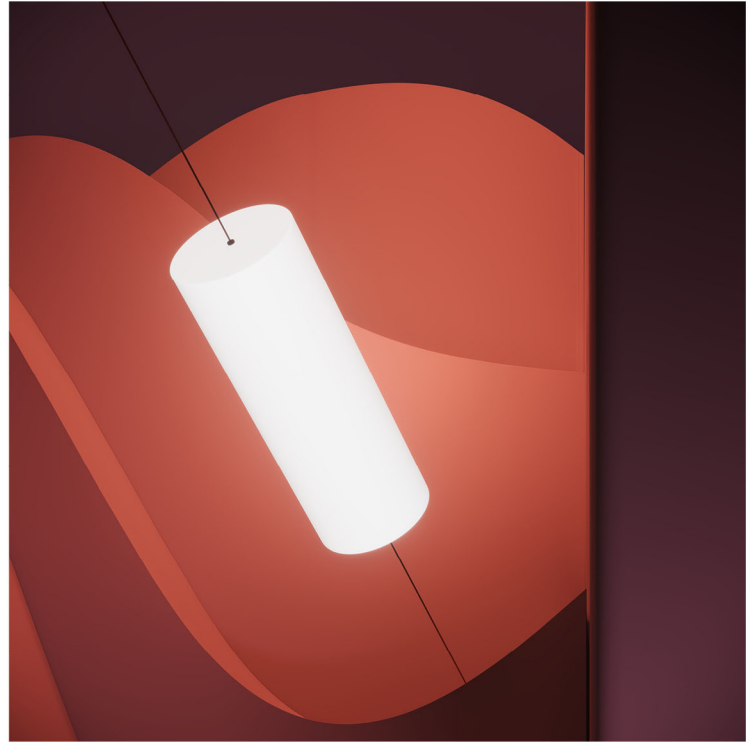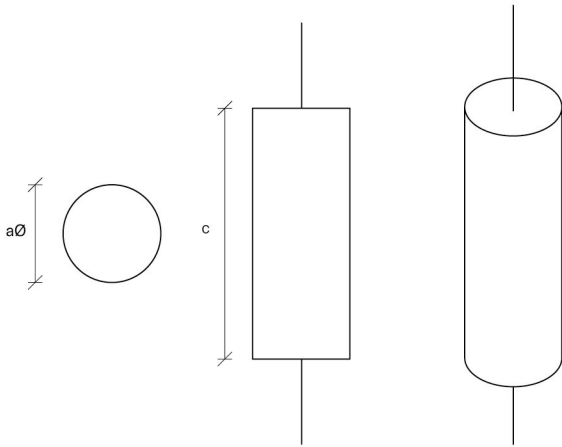

EXAMPLE ORDER CODE

FAB-F-CYL-OD40-100-40-FA-2700-SWITCHED

DIM A	DIM C	IP RATING	DIFFUSER	LIGHT COLOUR	CONTROL
OD 40	100	40	Frosted Acrylic - FA	2700	Switched
OD 50	500	44	Dark Acrylic - DA	3000	Dali
OD 60	1000	65		4000	DMX
OD 70	1500	67		5000	Art-Net
OD 80	2000	68		RGB	Fab Content
OD 90				RGBW	
OD 100				RGBWW	
OD 200				RGBCW/WW	
OD 300					
SITE	SITE				

