


FEATURES

- Customised shape according to your project.
- Fully homogeneous and uniform diffuser appearance.
- Range of light outputs available.
- Surface mounted, flush recessed and plaster-in variations.
- 50,000+ hours life expectancy.
- Emergency lighting with 3 hour operation.
- IP40 up to IP68 protection available.
- Diffuser customisations and optics available.
- Wide selection of controls options.
- Luminaire output up to 10,000 lm/m²

TECHNICAL INFO

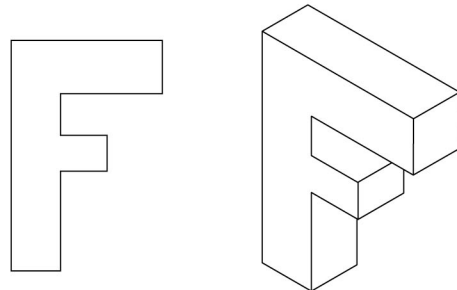

EXAMPLE ORDER CODE

FAB-F-X-SITE-SITE-SITE-55-40-2700-FA-CL-SWITCHED

DIM A	DIM B	DIM C	OUTPUT	IP RATING	LIGHT COLOUR	DIFFUSER	MOUNTING	CONTROL
SITE	SITE	SITE	55	40	2700	Frosted Acrylic - FA	Clips - CL	Switched
			110	44	3000	Opal Acrylic - OA	Suspended - S	Dali
			165	65	4000	Dark Acrylic - DA		DMX
				67	5000	Opal Glass - OG		Art-Net
				68	RGB			Fab Content
					RGBW			
					RGBWW			
					RGBCW/WW			