



# LIGHT LINE RAIL RECTANGULAR



## FEATURES

- Handrail system with flexible fixing solutions.
- Stainless steel, aluminium, timber and leather finishes.
- Fully homogeneous and uniform diffuser appearance.
- Range of light outputs available.
- 50,000+ hours life expectancy.
- Emergency lighting with 3 hour operation.
- 5V, 12V, 24V and 48V variants available to suit the project.
- IP44 up to IP65 protection available.
- Straight lengths and custom curves.
- Wide selection of controls options.
- Luminaire efficacy average 70 lm/W

## TECHNICAL INFO

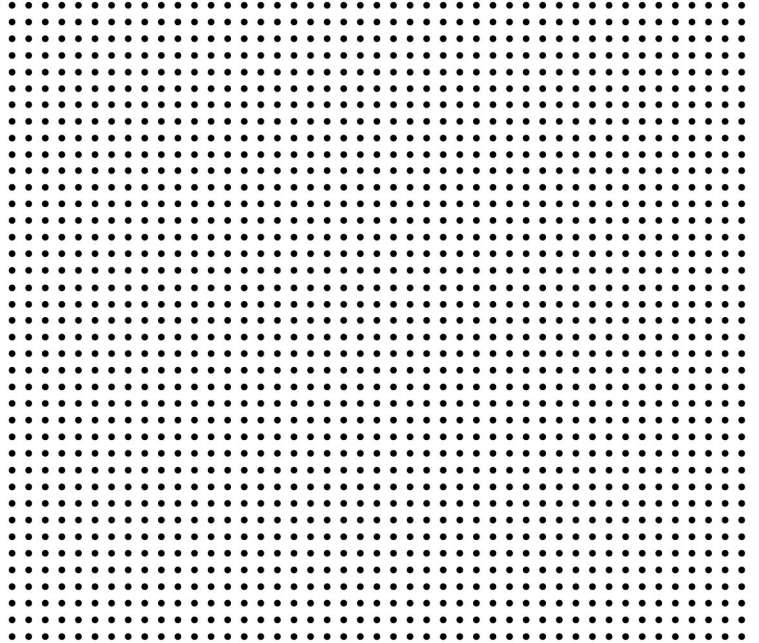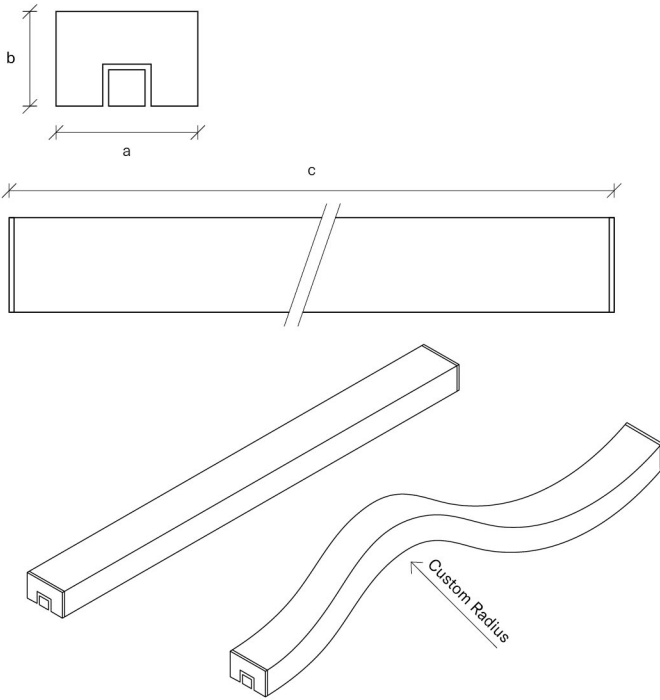

## EXAMPLE ORDER CODE

FAB-LI-RAIL-REC-40-40-500-9.6-SS-44-2700-FA-RA-BL-SWITCHED

DIM A	DIM B	DIM C	OUTPUT	TYPE	IP RATING	LIGHT COLOUR	DIFFUSER	FINISH	MOUNTING	CONTROL
40	40	500	9.6	SS	44	2700	Frosted Acrylic - FA	Raw Aluminium - RA	Ballustrade - BL	Switched
60	40	1000	14	OAK	65	3000	Dark Acrylic - DA	Anodised Silver - AS	Wall Mounted - WM	Dali
		1500	18	BEECH		4000		Anodised Black - AB		DMX
		2000		ALU		5000		Anodised Colour - ARAL		Art-Net
		2500				RGB		Powder Coat White - PW		Fab Content
		5000				RGBW		Powder Coat Black - PB		
SITE	SITE	SITE		SITE		RGBWW		Powder Coat Colour - PRAL		
						RGBCW/WW		Stainless Steel - SS		
								Oak - OA		
								Beech - BE		