
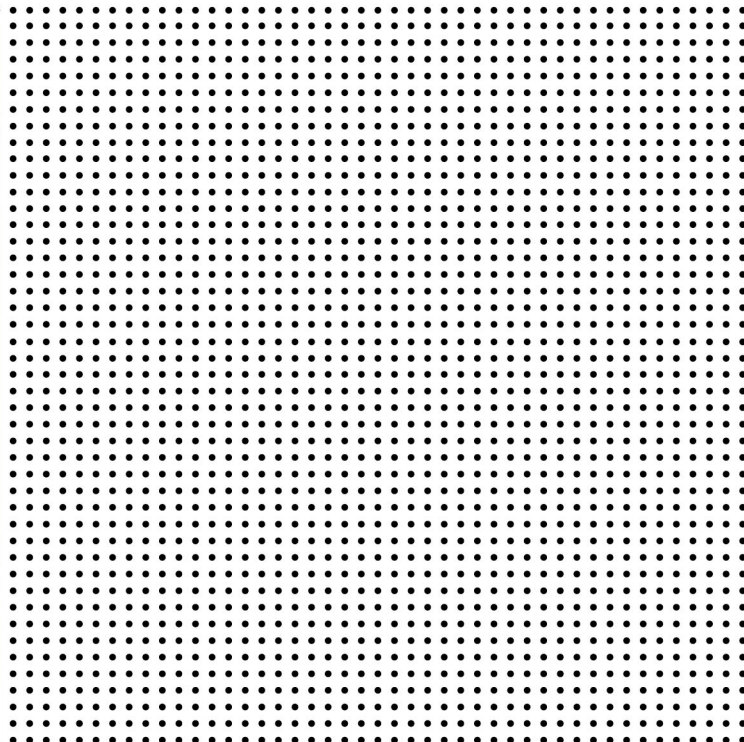



LIGHT LINE RAIL ROUND

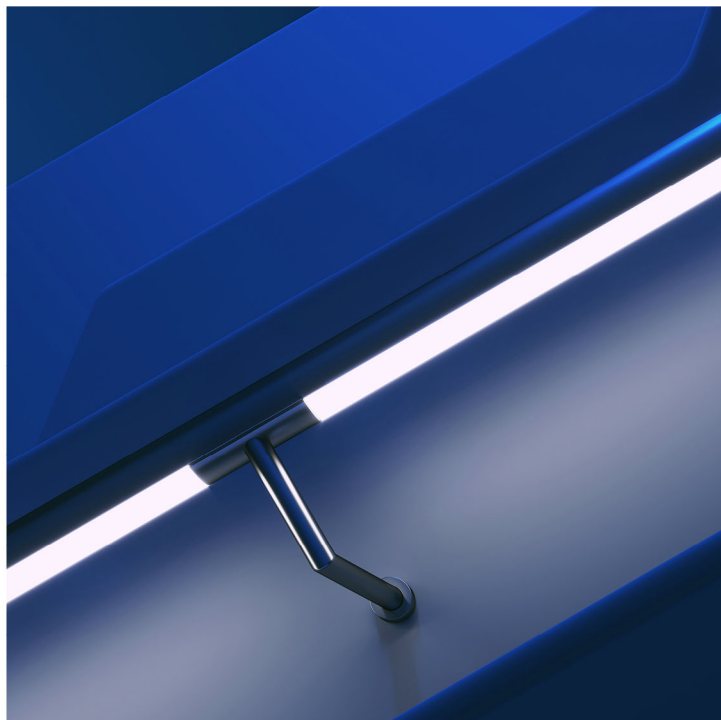

FEATURES

- Handrail system with flexible fixing solutions.
- Stainless steel, aluminium, timber and leather finishes.
- Fully homogeneous and uniform diffuser appearance.
- Range of light outputs available.
- 50,000+ hours life expectancy.
- Emergency lighting with 3 hour operation.
- 5V, 12V, 24V and 48V variants available to suit the project.
- IP44 up to IP65 protection available.
- Straight lengths and custom curves.
- Wide selection of controls options.
- Luminaire efficacy average 70 lm/W

TECHNICAL INFO

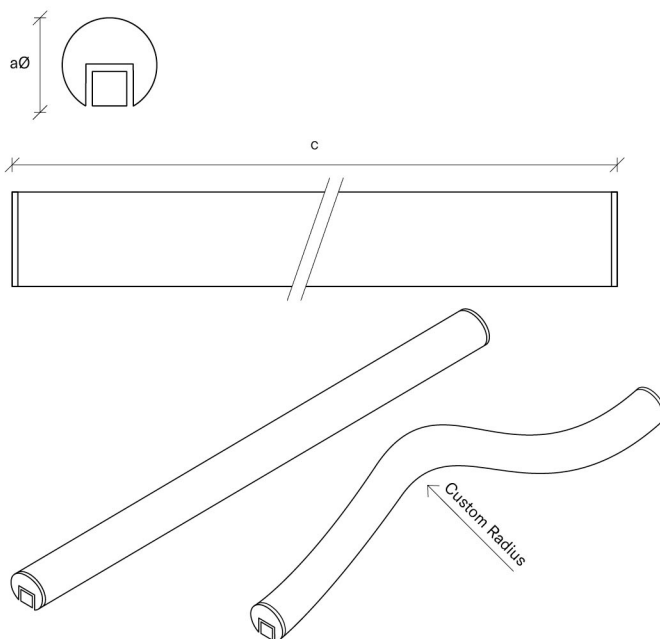

EXAMPLE ORDER CODE

FAB-LI-RAIL-ROU-42.4-500-SS-9.6-44-2700-FA-RA-BL-SWITCHED

DIM A	DIM C	TYPE	OUTPUT	IP RATING	LIGHT COLOUR	DIFFUSER	FINISH	MOUNTING	CONTROL
42.4	500	SS	9.6	44	2700	Frosted Acrylic - FA	Raw Aluminium - RA	Ballustrade - BL	Switched
48.3	1000	OAK	14	65	3000	Dark Acrylic - DA	Anodised Silver - AS	Wall Mounted - WM	Dali
60.3	1500	BEECH	18		4000		Anodised Black - AB		DMX
	2000	ALU			5000		Anodised Colour - ARAL		Art-Net
	2500				RGBW		Powder Coat White - PW		Fab Content
	5000				RGBW		Powder Coat Black - PB		
SITE	SITE	SITE			RGBWW		Powder Coat Colour - PRAL		
					RGBCW/WW		Stainless Steel - SS		
							Oak - OA		
							Beech - BE		