


SURFACES LIGHTBOX RECTANGULAR



FEATURES

- Fully homogeneous and uniform diffuser appearance.
- Connect or abut fixtures with seamless light.
- Stainless steel, aluminium, brass and copper finishes.
- Range of light outputs available.
- Surface mounted, flush recessed and plaster-in variations.
- 50,000+ hours life expectancy.
- IP44 up to IP68 protection available.
- Diffuser customisations and optics available.
- Wide selection of controls options.
- Luminaire output up to 10,000 lm/m².

TECHNICAL INFO

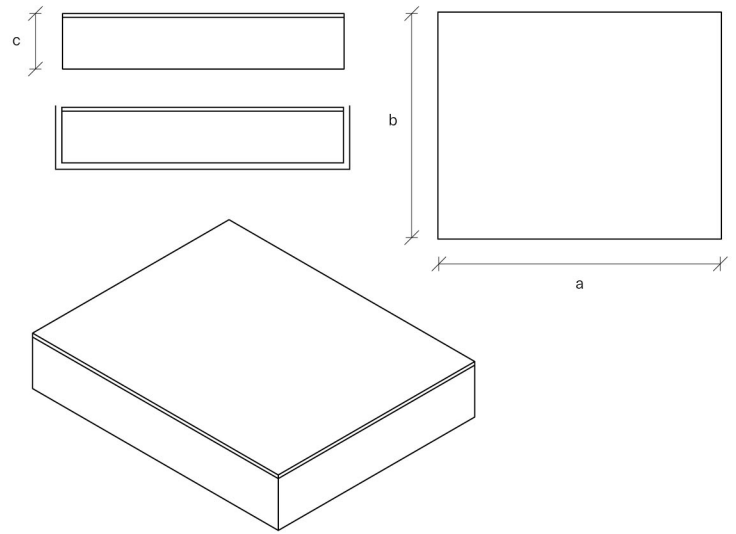

EXAMPLE ORDER CODE

FAB-B-REC-100-100-50-55-40-2700-FA-RA-CL-SWITCHED

DIM A	DIM B	DIM C	OUTPUT	IP RATING	LIGHT COLOUR	DIFFUSER	FINISH	MOUNTING	CONTROL
Min 100	Min 100	Min 50	55	44	2700	Frosted Acrylic - FA	Raw Aluminium - RA	Clips - CL	Switched
500	500	80	110	65	3000	Dark Acrylic - DA	Anodised Silver - AS	Recessed Box - RB	Dali
1000	100	100	165	67	4000	Opal Glass - OG	Anodised Black - AB	Suspended - S	DMX
Max 1200	Max 3000	100		68	5000		Anodised Colour - ARAL	In-ground - ING	Art-Net
					RGB		Powder Coat White - PW		Fab Content
SITE	SITE	SITE			RGBW		Powder Coat Black - PB		
					RGBWW		Powder Coat Colour - PRAL		
					RGBCW/WW		Stainless Steel - SS		
							Brass - BR		
							Copper - CO		

