



SURFACES PANEL ROUND



FEATURES

- Even surface illumination with Fabricate's custom edge-lighting system.
- Acrylic or Tempered glass with a range of glazing and lamination options.
- Stainless steel, aluminium, brass and copper finishes.
- Range of light outputs available.
- Balustrade and channel integration.
- 50,000+ hours life expectancy.
- 5V, 12V, 24V and 48V variants available to suit the project.
- IP40 up to IP68 protection available.
- Diffuser customisations and available.
- Wide selection of controls options.
- Luminaire output up to 5500 lm/m².

TECHNICAL INFO

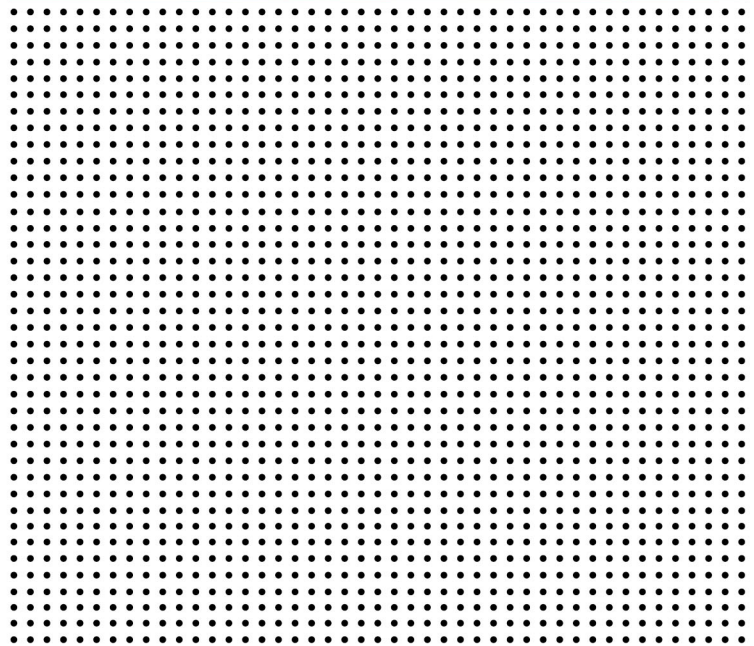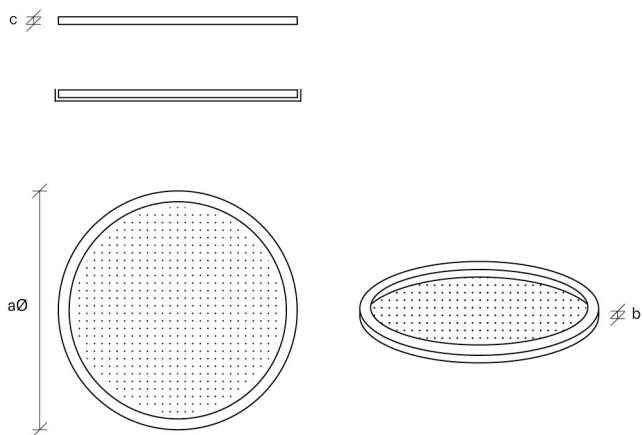

EXAMPLE ORDER CODE

FAB-P-ROU-100-10-8-55-40-2700-WHT-RA-CL-SWITCHED

DIM A	DIM B	DIM C	OUTPUT	IP RATING	LIGHT COLOUR	DIFFUSER	FINISH	MOUNTING	CONTROL
100	Min 10	8	55	40	2700	White Dots - WHT	Raw Aluminium - RA	Clips - CL	Switched
300	20	10	110	44	3000	Gold Dots - GLD	Anodised Silver - AS	Recessed Channel - RC	Dali
500	30	12	165	65	4000	Custom Dot Pattern - CDP	Anodised Black- AB	Suspended - S	DMX
1000	40	15.5		67	5000		Anodised Colour - ARAL	In-ground - ING	Art-Net
Max 2000	50	17.5		68	RGB		Powder Coat White - PW		Fab Content
	100	25.5			RGBW		Powder Coat Black - PB		
SITE	SITE	SITE			RGBWW		Powder Coat Colour - PRAL		
					RGBCW/WW		Stainless Steel - SS		
							Brass - BR		
							Copper - CO		